

THE KATZENBERG TUNNELRHINE VALLEY LINE MAJOR PROJECT



Project Report

THE LATEST SYSTEMS FOR SPEED AND SAFETY IN THE KATZENBERG TUNNEL

The Rhine Valley line – A major project of Deutsche Bahn AG

The Rhine Valley line, one of the most heavily travelled lines in the DB network, is a key line for north-south connections for passenger traffic and the transport of goods. The complete four-track construction and expansion of the line between Karlsruhe and Basel will optimise railway traffic in the region by 2020.

Katzenberg Tunnel interface

The new Katzenberg Tunnel between Bellingen and Efringen-Kirchen has significantly increased capacities and the maximum line speed of the Rhine Valley line connection. The high-speed overhead contact line in the two parallel, single-track tunnels enables transit speeds of up to 250 km/h, enabling a distance of 9 385 metres to be travelled in 2 minutes and 15 seconds. The connection of the complete, expanded tunnel to the Rhine Valley line took place on schedule in December 2012.

Overhead contact line, 50 Hz power supply and track systems: three tasks for Rail Power Systems

In the scope of this major project, Rail Power Systems Germany was assigned three central technical tasks. First the contract was issued for the planning and construction of the high-speed overhead contact line. This sub-project was completed according on schedule by the end of 2011.

As the expansion work in the two tunnels progressed, Rail Power Systems was able to take on two additional sub-projects:

- The contract for the planning, supply, assembly and commissioning of the electrotechnical equipment for the 50 Hz power supply and tunnel safety lighting.
- The delivery and installation of long-welded rails for the structural completion of the track systems in the west and east tunnels.





GREATER PERFORMANCE WITH INNOVATIVE OVERHEAD CONTACT LINE SYSTEMS

Designed for a comfortably high speed

The overhead contact line systems for the Katzenberg Tunnel project must accommodate high speeds of travel, which necessitates a correspondingly powerful electrical power transfer. Rail Power Systems used an innovative method for fastening the catenaries: the overhead contact line in the Katzenberg Tunnel was designed as an Re 330 with an amplifier conductor. Rail Power Systems' engineers developed a modified high-speed catenary for single-track tunnels in the segmental liner construction in the Munich Catenary Competence Centre.

Precise project progression with demanding timing

Work on the power supply of the Katzenberg Tunnel began at the end of 2009. Rail Power Systems' planning and preparation were performed at the fastest possible rate from the start. Project engineers conducted measurements in December 2009. The initial drilling took place in January 2010. Then, in the west tunnel, a 680 m long reference line for the presentation and approval of the new catenary was installed. The system for the electrification was finalised according on schedule at the end of 2011.

Demanding tunnel catenary

In addition to the modified high-speed catenary, Rail Power Systems developed a process variant for the fastening of the catenary. As part of this process, cantilever components and other components of the catenary system are not fastened onto anchor rails already installed in the segmental liner sections. Instead, they are fastened directly onto the tunnel rings by means of anchors. A standard distance of 48 m between support points had to be observed in the planning and, at the same time, the fastenings could only be attached in an 8 cm wide drilling channel in the segmental liner rings, the individual segments of which vary in position in the ring. In addition, the keystone, which is continuously offset by at least 15 mm in relation to the adjacent rings, may not be drilled. In order to meet the high demands for dimensional accuracy of the Re 330, as well as for dust-free drilling, the specialists at Rail Power Systems designed nine drilling templates for the various catenary components. As a result, dirt was unable to enter the tunnel and drilling dust was extracted in the same process step.

Impressive engineering performance setting new standards

For the approval of the modified construction method of Re 330, Rail Power Systems submitted its results from a structural analysis, product certifications and demonstration testing. They were approved by DB Systems Technology in late January 2010 and the drawing documentation for the modified catenary "Re 330 single-track tunnel in segmental liner construction" for the Katzenberg Tunnel was incorporated into the Deutsche Bahn AG standard register of drawings.

Overview of the facts

Key technical data and connection lines

Stations and exposed track sections:

•	Pylons:	257
•	Overhead supply lines:	33 km
•	Re 200 catenary:	4 km
•	Newly laid sections of exposed track:	8.2 km
•	Re 250 catenary:	18 km

Tunnels:

•	Tunnel length:	9385 m
•	Segmental liner rings:	8969
•	Segmental liner blocks:	62783
•	Re 330 catenary:	22.5 km
•	RiM 120 overhead contact line (Cu-Mg 0.5):	120 mm ²
•	Tensioning force:	27 kN
•	Bz 120 supporting cable (Cu-Mg 0.4):	120 mm ²
•	Tensioning force:	21 kN
•	Tensioning length:	≤ 1400 m
•	Standard distance between support points:	48 m
•	Reinforcing conductor Al 240:	240 mm ²
•	Support points:	462
•	Overhead contact components to be fastened:	2150
•	Holes for catenary components:	6954
•	Holes for earthing conductors	
	and return conductors:	≈ 50000





Innovative thinking was called for – and proved its worth

Among the special requirements for Rail Power Systems was the need to design an innovative catenary system for both tunnels, with the capacity to handle high speeds of up to 250 km/h. As an additional test of the innovative abilities of the engineers, new fasteners had to be designed for the components of the catenary. For this purpose, special templates were used on site for drilling anchors into the tunnel casing. Additional innovations were also realised in the areas of monitoring and control. For example, two new remote control lines and eleven local control systems were set up for the monitoring of the new construction section. The tunnel received a high-voltage testing system with a central station and two substations, each equipped with two switches. An Re 250 overhead contact line was built on the two sections of exposed track between junction stations and tunnel. In addition, Rail Power Systems designed and equipped an earthing concept for the Katzenberg Tunnel.







INCREASED SAFETY WITH EFFICIENT 50 Hz POWER SUPPLY







From planning to operational readiness: everything from one supplier

Rail Power Systems is responsible for a second sub-project in the extensive Katzenberg Tunnel railway infrastructure project. The planning, delivery, assembly and commissioning of the electrical equipment based on 50 Hz was assigned to the Electrical and Signal Technology business division. The supplied equipment will safeguard both the power supply and the tunnel safety lighting.

In focus: two indispensable components for emergency situations

The 50 Hz power supply concept from Rail Power Systems is based on the seamless networking of all necessary systems and components. The latest equipment is used to ensure the highest standard of safety. Two standout features are: The latest generation of safety lamps for high-speed tunnels approved by DB AG. These ensure the provision of lighting, in accordance with the applicable standards, in the event of an emergency. The second standout feature is an innovative multi-socket installed in the tunnel. Over 150 of these units have been installed in order to enable potential-free withdrawal of power by rescue forces in the event of an emergency.

Overview of the facts


Implementation planning focuses on the following:

- Network planning with load and short-circuit calculations, safety designs and operating equipment dimensioning
- System planning with all overview and circuit diagrams as well as the necessary production documentation
- Creation of general CAD layouts and construction documentation
- Detailed planning of tunnel safety lighting conformity to TSI

Essential components fore delivery, assembly and commissioning include:

•	Medium and low-voltage cable	240 km
•	Buildings for RTC/DB	
	Energy transmission stations	2
•	Medium-voltage switchgears in	
	traverse headings within the tunnel	4
•	Low-voltage main distribution boards	
	in cross-cuts within the tunnel	19
•	Low-voltage distribution boards in	
	traverse headings within the tunnel	85
•	Emergency lighting supply units in the tunne	l 1400
•	Sub-distribution boards in the tunnel	350
•	Multi-socket units installed in the tunnel	150
•	Tunnel safety lamps	2650



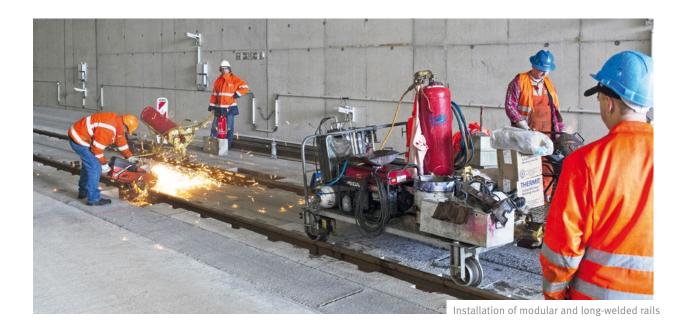

HIGH-SPEED MOBILITY WITH THE LATEST TRACK SYSTEMS

180 m long-welded rails for smooth travel

The third sub-project related to the Katzenberg Tunnel was contracted by the Max Bögl construction company of Neumarkt, Germany to the former Track business division of Rail Power Systems. It entails the delivery and installation of 180 m long welded rails, which are to be fastened onto the Bögl prefabricated slab system, which is installed ahead of time. In addition to the delivery of the new long-welded rails directly to the relevant construction sections, the contract includes the welding of the rail heads, the replacement of existing rails with long-welded rails and their permanent installation over the bracing with the Bögl prefabricated slab system.

Also on board: a highly innovative driving surface system

In order to ensure that vehicles on tyres will in future also be able to drive in the tunnel, a highly innovative driving surface system was created. This is indispensable for future service work. This system is placed directly on the Bögl prefabricated slab system and was integrated seamlessly into the general track construction of the two tunnels by Rail Power Systems:

Overview of the facts

The technical scope of the project at a glance:

- Delivery and installation of UIC 60 modular rails for a section length of 40 000 m
- Installation of long-welded rails in the format 180.00 m
 UIC 60 on a section length of 40 000 m
- A total of 220 flash-butt welds
- Grinding of the rolling skin on the section length of 40 000 m
- Installation of a total of 120 000 removable driving surface elements
- At the centre of this measure was the installation and alignment of the so-called "removable driving surface superstructure elements" (abO), for which special attachment systems were used.
- These abO covering elements are non-reinforced concrete block elements of the strength class C30/37 without transport anchors.

- Since they were specially developed by Max Bögl Bauunternehmung GmbH & Co. KG, they fit seamlessly into the driving surface system.
- These elements were installed to the left and right of the rails on the track supporting slab system under the direction of Rail Power Systems.
- Since the individual abO elements do not have transport anchors, a vacuum lifter specially designed for this purpose was used.
- The specially designed vacuum lifter was mounted on the rail/road excavator to allow the simultaneous placement of 10 elements on the track supporting slab.
- After the placement of the abO elements, each one element had to be aligned precisely to the last millimetre.
- A new additional alignment system was designed and used for this important task. This system was also used as a rail-guided attachment for the rail/road excavator.
- Once all abO units were perfectly aligned, the centre channel between the tracks and the outside channels lying on the tracks could be filled with concrete. The driving surface was then complete.

Details of the project's progress and local conditions:

January 2011

East tunnel, south entrance:

- Auxiliary track installation
- Unloading and storage of 20000 m of modular rail

June 2011 – August 2011

East tunnel

- Unloading and storage of 20000 m of modular rail
- Installation of 20 000 m of modular rail
- Installation of a total of 60 000 units of removable driving surface elements

November 2011 - February 2012

West tunnel

- Installation of 20000 m of modular rail
- Installation of a total of 60 000 units of removable driving surface elements

June 2012 – July 2012

West and east tunnels

- Replacement of 40 000 m of rail
- 220 flash-butt welds
- Grinding of 40000 m of rail









© 2016 All rights reserved by Rail Power Systems GmbH.
The specifications set out in this document apply to popular applications. They do not represent performance limits. This means
that divergent specifications may be attained in specific applications. The contract ually agreed specifications alone shall apply.
We reserve the right to effect technical modifications. TracFeed® is a registered trademark of Rail Power Systems GmbH.

RPS/EN/202/0916